


LIQUID TIGHT STEEL FLEXIBLE CONDUIT



DFX LT - HIGH & LOW TEMPERATURE, OIL RESISTANT, GALVANIZED STEEL.

CAT#	Size	Internal Diameter Min/Max (mm)	External Diameter Min/Max (mm)	Min. Bend Radius (mm)	Coil Packing (m)
DFX 801	3/8"	12.3/12.8	17.5/18.0	60	50
DFX 802	1/2"	15.8/16.3	20.8/21.3	75	50
DFX 803	3/4"	20.7/21.2	26.2/26.7	85	50
DFX 804	1"	26.4/26.8	32.7/33.4	110	50
DFX 805	1¼"	35.05/35.4	41.4/42.2	130	25
DFX 806	1½"	40.1/40.6	47.4/48.3	150	25
DFX 807	2"	51.3/51.9	59.4/60.3	190	25
DFX 808	2½"	63.0/63.6	72.1/73.0	250	10
DFX 809	3"	78.0/78.7	87.9/88.9	310	10
DFX 810	4"	101.6/102.6	113.2/114.3	360	10

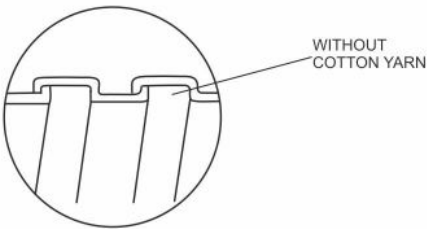

Straight Connector



90° Connector