



# Exhaust filter series

Optional parts




## Characteristics

- Frame material uses anti-flame and heat resisting ABS plastic, of which fire resistance are accord with UL-94 Vo.
- Installation without screws are accord with standard of VDE 0113 (EN 60204).
- Optional equips polyester fiber filter pad of 100g/m<sup>2</sup>, 150g/m<sup>2</sup>, 350g/m<sup>2</sup>, built-in standard is 150g/m<sup>2</sup>. Standard max static pressure 86Pa/62Pa max relative humidity 90%.
- Temperature range : (unconcretionary) -20℃~+65℃ (store temperature) -20℃~+70℃

- 100g/m<sup>2</sup> 150g/m<sup>2</sup> 350g/m<sup>2</sup> 150g/m<sup>2</sup> 86Pa/62Pa 90%
- -20℃~+65℃ -20℃~+70℃

## Outline Dimensions



Units: mm

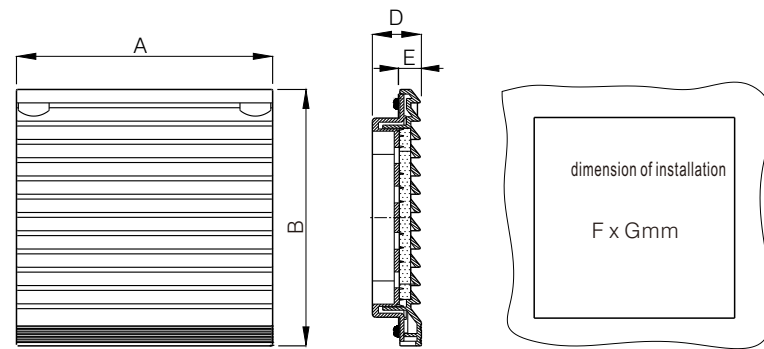


| Type<br>□□□□<br>RAL 7035 | External dimensions<br>□□□□ |       |      |      | Opening size<br>□□□□ |       | IP | Filter pad<br>□□□□ |         | Related<br>Info page<br>□□□□□ |
|--------------------------|-----------------------------|-------|------|------|----------------------|-------|----|--------------------|---------|-------------------------------|
|                          | A                           | B     | D    | E    | F                    | G     |    | level              | Size    |                               |
| JK 6620                  | 106.5                       | 106.5 | 22   | 10   | 82.5                 | 82.5  | 54 | G2                 | 75x75   | 91/92                         |
| JK 6621                  | 116.5                       | 116.5 | 22   | 10   | 93                   | 93    | 54 | G2                 | 85x85   | 93/94                         |
| JK 6622                  | 148.5                       | 148.5 | 27.5 | 10   | 122.5                | 122.5 | 54 | G2                 | 115x115 | 95/96                         |
| JK 6623                  | 204.5                       | 204.5 | 30   | 13.5 | 176                  | 176   | 54 | G2                 | 170x170 | 97/98                         |
| JK 6625                  | 255                         | 255   | 30.5 | 13.5 | 222                  | 222   | 54 | G2                 | 215x215 | 99/100                        |
| JK 6626                  | 324                         | 324   | 30.5 | 13.5 | 290                  | 290   | 54 | G2                 | 285x285 | 101/102                       |
| JK 6626D                 | 324                         | 324   | 30.5 | 13.5 | 290                  | 290   | 54 | G2                 | 288x288 | 103/104                       |



Ventilation shutter  
Built-in black filter sponge  
Finger guard for axial fan

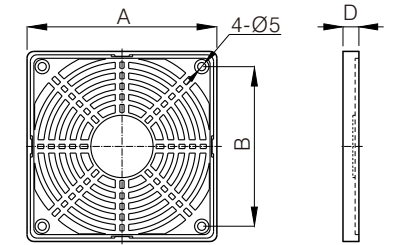


| Type<br>□□□□ | External dimensions<br>□□□ |       |      |
|--------------|----------------------------|-------|------|
|              | A                          | B     | D    |
| LP 4008      | 8.6                        | 71.5  | 10   |
| LP 4009      | 9.6                        | 82    | 10   |
| LP 4012      | 115                        | 104.8 | 10.5 |

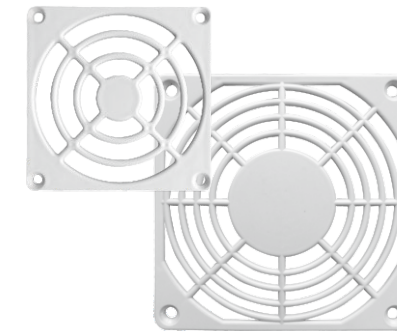


ABS plastic guard  
Color RAL 7035


ABS □□□□□  
□□ RAL 7035

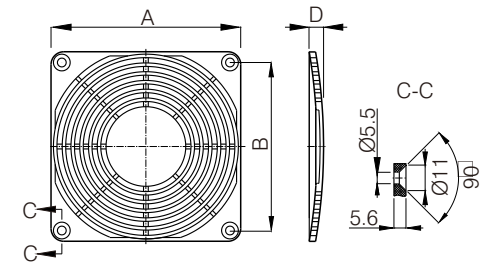

| Type<br>□□□□ | External dimensions<br>□□□ |       |     |
|--------------|----------------------------|-------|-----|
|              | A                          | B     | D   |
| LP 4208      | 80                         | 71.5  | 7   |
| LP 4209      | 92                         | 82    | 7   |
| LP 4212      | 120                        | 104.8 | 6.5 |

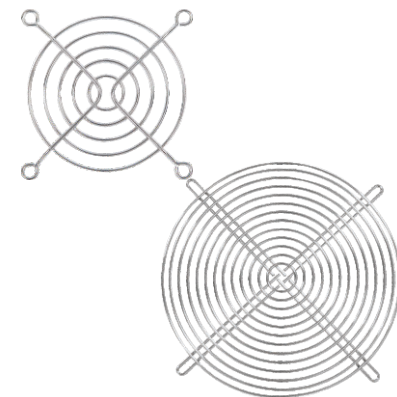

Metal guard  
Surface nickel plating  
Better corrosion resistance

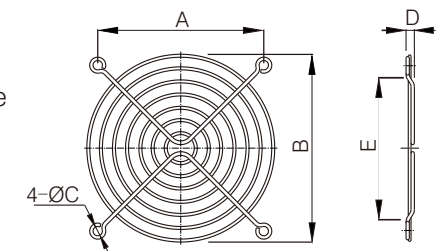

| Type<br>□□□□ | External dimensions<br>□□□ |       |     |      |     |
|--------------|----------------------------|-------|-----|------|-----|
|              | A                          | B     | C   | D    | E   |
| LP 2204      | 32                         | 29.5  | 4.5 | 4.5  | 35  |
| LP 2206      | 50                         | 53    | 5   | 5    | 57  |
| LP 2208      | 71.5                       | 73    | 5.3 | 5    | 85  |
| LP 2209      | 82                         | 87    | 5.3 | 5.4  | 102 |
| LP 2212      | 104.8                      | 115.5 | 5.5 | 5.4  | 133 |
| LP 2215      | 114.5                      | 140   | 5.5 | 5.4  | 152 |
| LP 2222      | 170                        | 215.5 | 5.5 | 9.5  | 209 |
| LP 2225      | 208.6                      | 268   | 6.6 | 11.5 | 257 |